
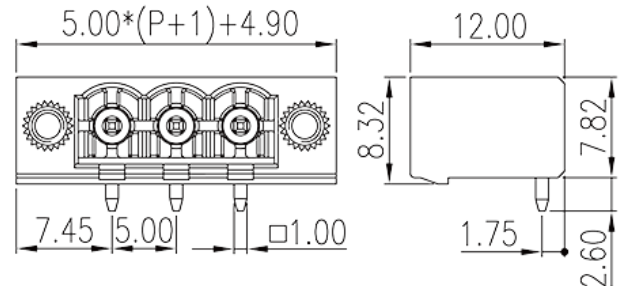


# 5EHDRRM-XXPL

PCB Terminal Blocks &gt; PCB Connector-Socket

Date:2026-04-06Version:V1

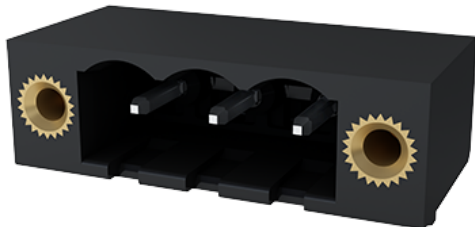

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design. The final product is made according to engineering drawing.

## Product Description

Pitch : 5.00 mm, 300V, 15A

## General information

|  |   |
|--|---|
| Short description                      | PCB Connector – Socket, Reflow Soldering  |
| Category                               | PCB Connector – Socket  |
| Pitch (mm)                             | 5.00  |
| Color                                  | Black (default)   |
| Type of locking                        | With threaded flange  |
| Soldering method                       | Reflow Soldering (Temperature condition according to standard IPC/JEDEC J-STD-020E) |
| Length (mm)                            | $5.00*(P-1)+14.9$   |
| Width (mm)                             | 12  |
| Height (mm)                            | 8.32  |
| Pin demensions (Thickness x Width)(mm) | 1.0x1.0   |
| PCB hole diameter (mm)                 | 1.6~1.7   |
| Number of positions                    | 02P~24P   |
| Level                                  | Single level  |

## Material information

|  |                           |
|--|---------------------------|
| Insulation material                          | HIGH-TEMPERATURE PLASTICS |
| Insulation material group                    | IIIa                      |
| Flame retardant rating , compliant with UL94 | V0                        |
| Insulation resistance                        | □500MΩ at DC 500V         |
| Conductor material                           | COPPER ALLOY              |
| Plating of conductor surface                 | Tin PLATED                |
| MSL  | 1                         |

## Connection data-IEC

|  |     |
|--|-----|
| Rated voltage (V)                        | 600 |
| Rated current (A)                        | 18  |
| Rated voltage (II/2)(V)                  | 600 |
| Rated voltage (III/2) (V)                | 400 |
| Rated voltage (III/3)(V)                 | 320 |
| Rated impulse voltage (II/2)(KV)         | 4   |
| Rated impulse voltage (III/2)(KV)        | 4   |
| Rated impulse voltage (III/3)(KV)        | 4   |
| Tightening torque with flange. max (N.m) | 0.2 |

## Connection data-UL

|                                   |     |
|-----------------------------------|-----|
| Rated voltage (UL/CUL Group B)(V) | 300 |
| Rated current (UL/CUL Group B)(A) | 15  |
| Rated voltage (UL/CUL Group D)(V) | 300 |
| Rated current (UL/CUL Group D)(A) | 15  |

## Environment & Safety

|                                 |     |
|---------------------------------|-----|
| Finger protection (YES or NO)   | YES |
| Operating temperature. max (°C) | 120 |
| Operating temperature. min (°C) | -40 |



## UL Recognized

|                            |     |
|----------------------------|-----|
| Rated voltage (Group B)(V) | 300 |
| Rated current (Group B)(A) | 15  |
| Rated voltage (Group D)(V) | 300 |
| Rated current (Group D)(A) | 15  |

## CUL Recognized

|                            |     |
|----------------------------|-----|
| Rated voltage (Group B)(V) | 300 |
| Rated current (Group B)(A) | 15  |
| Rated voltage (Group D)(V) | 300 |
| Rated current (Group D)(A) | 15  |

## Drawings

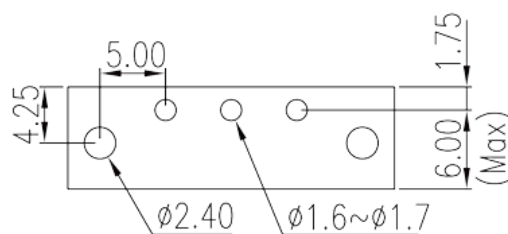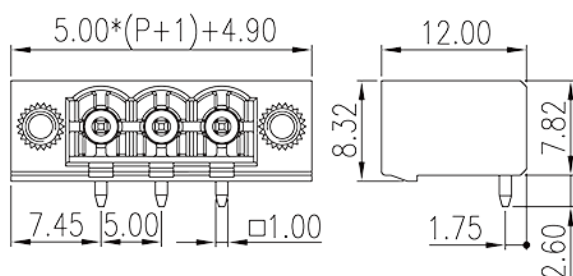

## Approvals

