
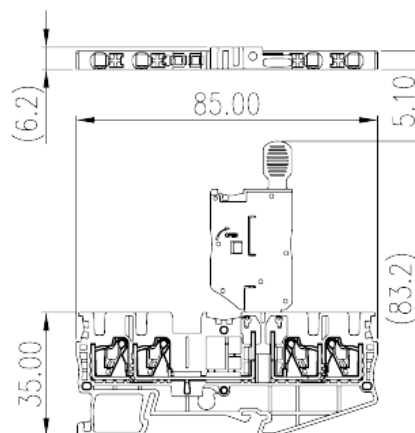


# DP2.5N-TR-MLXX

DIN Rail Terminal Blocks > Push-in Design

Date:2026-04-06

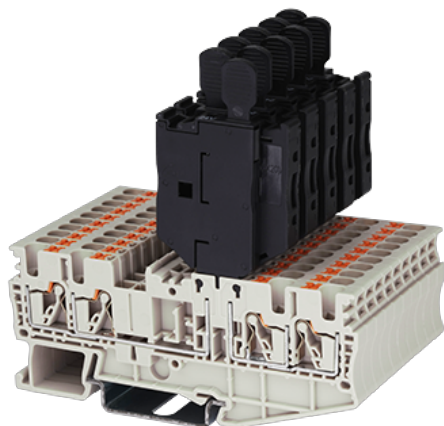

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design. The final product is made according to engineering drawing.

## Product Description

24V/60V/250V, 10A, Beige (default)

## General information

|                     |                                     |
|---------------------|-------------------------------------|
| Short description   | Fuse Terminal Block, Push-in Design |
| Category            | Fuse Terminal Block                 |
| Color               | Refer to drawing                    |
| Connection method   | Push-in Design                      |
| Type of locking     | Rail Mounting                       |
| Length (mm)         | 85                                  |
| Width (mm)          | 6.2                                 |
| Height (mm)         | 84.7 ( TS-35N ) / 92.2(TS-35/15N)   |
| Number of positions | ≥1P                                 |
| Level               | Single level                        |
| Connection points   | 4                                   |

## Material information

|  |    |
|--|----|
| Insulation material                          | PA |
| Insulation material group                    | I  |
| Flame retardant rating , compliant with UL94 | V0 |

Insulation resistance

 $\geq 500M\Omega$  at DC 500V

## Connection data-IEC

|   |  |
|---|--|
| Rated voltage (V)   | 24/60/250  |
| Rated current (A)   | 6.3 (the Current is determined by the fuse used) |
| Rated voltage (III/3)(V)  | 24/60/250  |
| Rated impulse voltage (III/3)(KV)   | 4  |
| Conductor cross section solid. min (mm <sup>2</sup> )   | 0.2  |
| Conductor cross section solid.max (mm <sup>2</sup> )  | 4  |
| Conductor cross section stranded. min (mm <sup>2</sup> )  | 0.2  |
| Conductor cross section stranded. max (mm <sup>2</sup> )  | 2.5  |
| Conductor cross section flexible, with min ferrule without plastic sleeve (mm <sup>2</sup> )            | 0.25   |
| Conductor cross section flexible, with max ferrule without plastic sleeve (mm <sup>2</sup> )            | 2.5  |
| Conductor cross section flexible, with min ferrule with plastic sleeve (mm <sup>2</sup> )               | 0.25   |
| Conductor cross section flexible, with max ferrule with plastic sleeve (mm <sup>2</sup> )               | 2.5  |
| 2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm <sup>2</sup> ) | 0.5  |
| 2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm <sup>2</sup> ) | 0.5  |
| Slotted screwdriver size (Blade thickness x Width)(mm)  | 0.6x3.5  |
| Stripping Length (mm)   | 10   |
| Mounting rail   | TS-35N · TS-35/15N                               |
| End cover plate required  | YES  |
| Grounding connections   | NO   |



## Connection data-UL

|  |           |
|--|-----------|
| Rated voltage (UL/CUL Group B)(V)                | 24/60/250 |
| Rated current (UL/CUL Group B)(A)                | 10        |
| Min. solid wire connection (AWG) acc. to UL/CUL  | 26        |
| Max. solid wire connection AWG acc. to UL/CUL    | 12        |
| Min. stranded wire connection AWG acc. to UL/CUL | 26        |
| Max. stranded wire connection AWG acc. to UL/CUL | 12        |

## Environment & Safety

|   |     |
|---|-----|
| Back of the hand protection (YES or NO) | YES |
| Finger protection (YES or NO)           | YES |
| Operating temperature. max (°C)         | 120 |
| Operating temperature. min (°C)         | -40 |

## Drawings

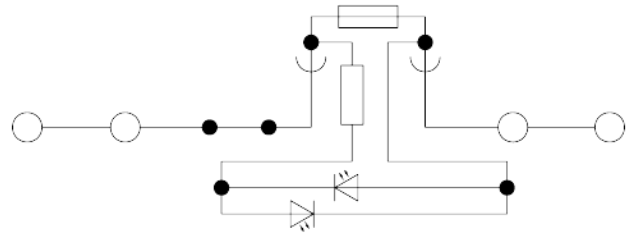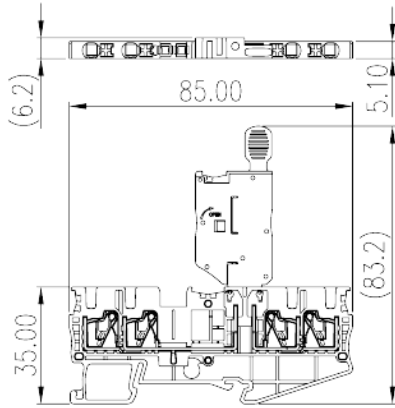

## Approvals

